


ENTRANCE MATTING SYSTEM CLEAN SYSTEM RYPS/SCRUB

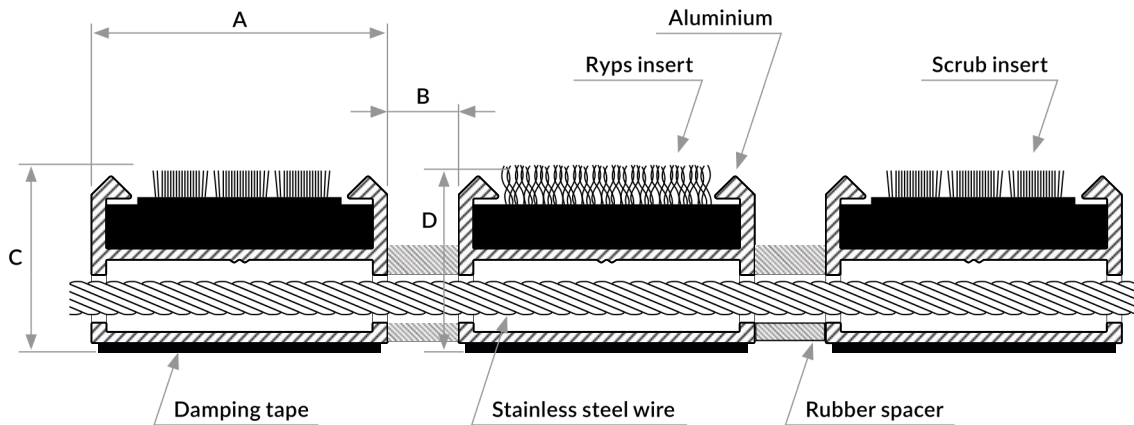

	A [mm]	B [mm]	Scrub C [mm]	Ryps D [mm]
Clean System Ryps/Scrub 12	30	3-5	18	15
Clean System Ryps/Scrub 17	30	3-5	22	18
Clean System Ryps/Scrub 22	30	3-5	25	22
Clean System Ryps/Scrub 27	30	3-5	32	28
Clean System Ryps/Scrub 22 Strong	32	3-5	25	22
Clean System Ryps/Scrub 22 Premium	51	3-5	25	22

■ PRODUCT SPECIFICATION:

Doormats Clean System Ryps/Scrub are made of aluminum with Ryps and Scrub insert. Profiles are coupled with stainless steel cord. Aluminum profiles are separate with rubber spacers. Construction allow us to easy roll for clearing and transporting the mat. Under aluminum profile is dumping tape.

Free space between aluminum profiles can have between 3mm and 4,5mm.

Construction of doormats allow us to manufacture mats in any dimensions and shapes. Width of the mat is obtained as a result of cutting the profiles and length is obtained as a result of adding aluminum profiles and squeezing rubber spacers.

Hygienic certificate	HK/B/0628/01/2014
Determination of the anti-slip property according to DIN 51130:2014	R13/R11
Reaction to fire classification according to PN-EN 13501-1+A1:2010	C _{fl} - s1
Profile material	EN AW 6063 T6
Static load	3 500 kg/100 cm ² - standard version 10 000 kg/100 cm ² - strong version
Textile insert	
Manufacturing process	felting
Fiber composition	100% polypropylene (PP) ISO 2424
Fiber weight	1 180 g/m ²
Fiber height	4 mm ISO 1765
Total mass	3 630 g/m ² +/- 15% ISO 8543
Total thickness	9,5 mm + 15%/-10% ISO 1765
Material permanently antistatic	ISO 6356
Scrub Insert	
PA6.6 fibre with the thickness of	0,4 mm
Base profile material	PP
Stainless steel wire with the thickness of	0,7 mm
<p>According to the manufacturer declaration, the scrub insert meets the requirements of the EU directive 2002/95/EC, which entered into force on 1 July 2006, and is manufactured in accordance with the ROHS 2002/95/EC directive.</p>	